


**Tier1**

BloombergNEF



Lloyd's Syndicate 1910



ISO14001

ISO9001

ISO45001




## M12 HIEFF TWIN MONO


### SPxxx-120M12

- Standard white (xxx=580~605W)
- Bifacial
- Black frame
- Full black

12 Yr quality guarantee | 25Yr power warranty

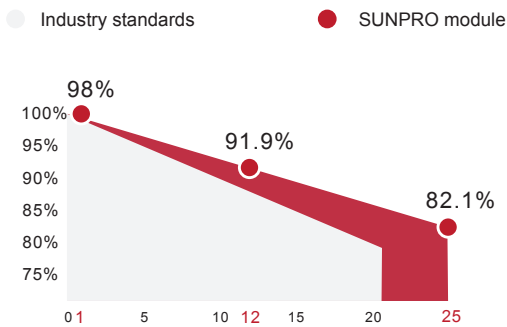

\*SUNPRO Standard tiered warranty

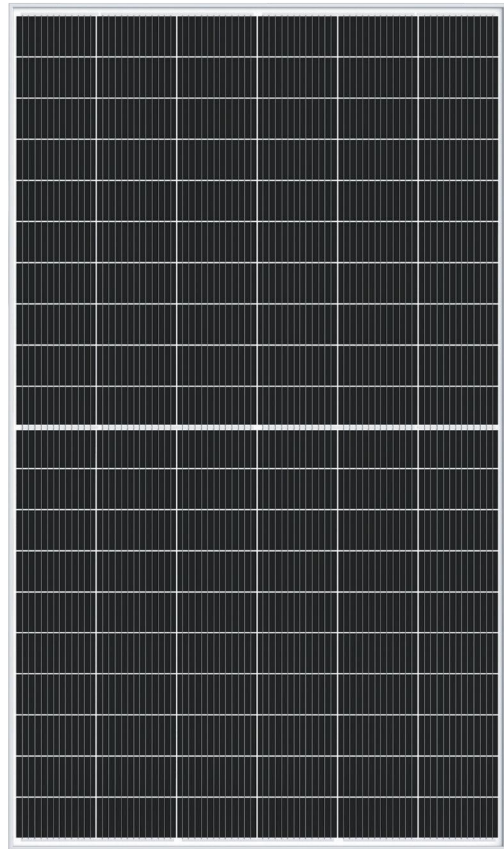

#### WARRANTY & GUARANTEE

Linear output power guarantee  
12 years: 91.9% power output  
25 years: 82.1% power output



#### WITHSTAND STRONG

Snow load 5400Pa  
Wind load 2400Pa



#### R&D AND PRODUCTION

Advanced production line.  
The leading solar cell cutting process and multi busbar design with SUNPRO Technology.



#### HIGH EFFICIENCY

Efficiency can reach 21.38%. Excellent low light performance. Higher power output under the conditions of haze, overcast, etc.



#### POWER TOLERANCE


Power positive tolerance: 0~+3%

Electrical parameters at standard test conditions (STC:AM=1.5, 1000W/m<sup>2</sup>, Cells Temperature 25°C)

**Typical type**

	580W	585W	590W	595W	600W	605W
Max power(Pmax)	580	585	590	595	600	605
Max power voltage(Vmp)	33.60	33.80	34.00	34.20	34.40	34.60
Max power current(Imp)	17.27	17.31	17.35	17.40	17.45	17.49
Open circuit voltage(Voc)	40.70	40.90	41.10	41.30	41.50	41.70
Short circuit current(Isc)	18.32	18.37	18.42	18.47	18.52	18.57
Module Efficiency(%)	20.50	20.67	20.85	21.02	21.20	21.38
Max system voltage	DC 1500V(TUV)					
Maximum Series Fuse Rating	30A					

**DIMENSIONS AND STRUCTURE**

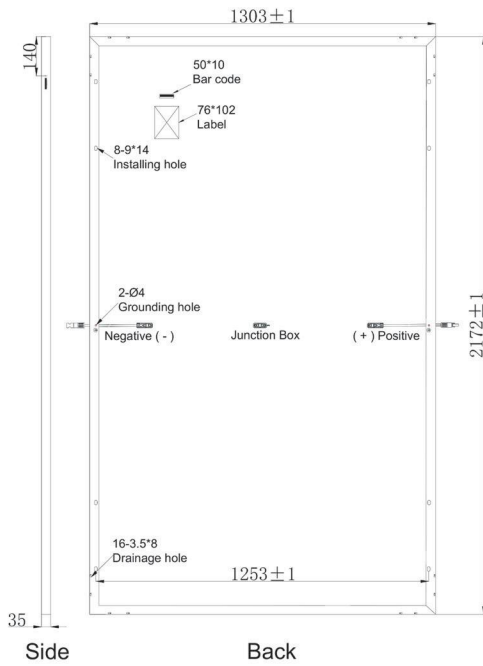

**Electrical parameters at NMOT test conditions**

(Irradiance 800W/m<sup>2</sup>, Ambient Temperature 20°C, AM 1.5, Wind Speed 1m/s)



**Typical type**

	580W	585W	590W	595W	600W	605W
Max power(Pmax)	472.6	476.4	480.2	484.3	488.5	492.3
Max power voltage(Vmp)	34.20	34.40	34.60	34.80	35.00	35.10
Max power current(Imp)	13.80	13.85	13.89	13.93	13.97	14.01
Open circuit voltage(Voc)	40.90	41.10	41.30	41.50	41.70	41.90
Short circuit current(Isc)	14.64	14.68	14.72	14.76	14.80	14.84

**Mechanical Data**

Dimensions	2172x1303x35mm
Weight	30.9 kg
Glass	3.2mm tempered glass
Output cables	4mm <sup>2</sup> , symmetrical lengths 1300mm
Connectors	MC4 compatible IP68
Cell type	Mono-Crystalline PERC, 12BB, 210x105mm
Number of cells	120 cells ( Half-Cell )

**I-V CHARACTERISTICS AT DIFFERENT IRRADIATION**

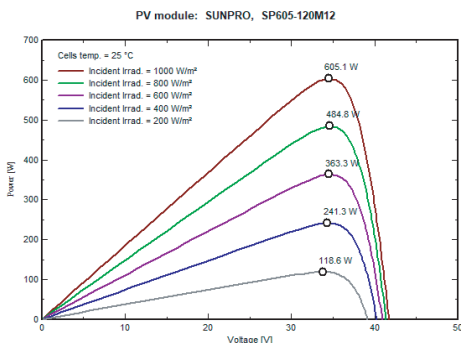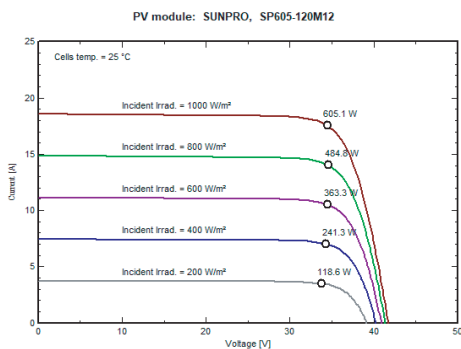

**Temperature Characteristics**

Temp.Coeff.of Isc(TK Isc)	0.049%/°C
Temp.Coeff.of Voc(TK Voc)	-0.27%/°C
Temp.Coeff.of Pmax(TK Pmax)	-0.35%/°C
Operating temperature	-40~+85°C
Normal operating cell temperature	44±2°C

**Packing Configuration**

Container	40'HQ
Pieces per pallet	31
Pallets per container	17
Pieces per container	527

**Tests, Certifications and Warranties**

Standard tests	IEC 61215, IEC 61730, IEC 61701, IEC 62716, PPP 58042B
System certs	ISO 9001, ISO14001, ISO45001, TUV
Certifications	TUV, AMMONIA AND SALT MIST CORROSION, ANTI-PID, CE, WEEE, INMERTRO, FIRE CERTIFICATE C1
Extreme wind and snow loads testing	Withstand extreme wind(2400 Pascal) and snow loads(5400 Pascal)
Power tolerance	0~+3%
Junction box	IP 68
Warranties	12 years product warranty and 25 years 82.1% of power